



LED Light Bar with QL-AL13 Aluminum Profile

Constant Current Version+CRI ≥ 90

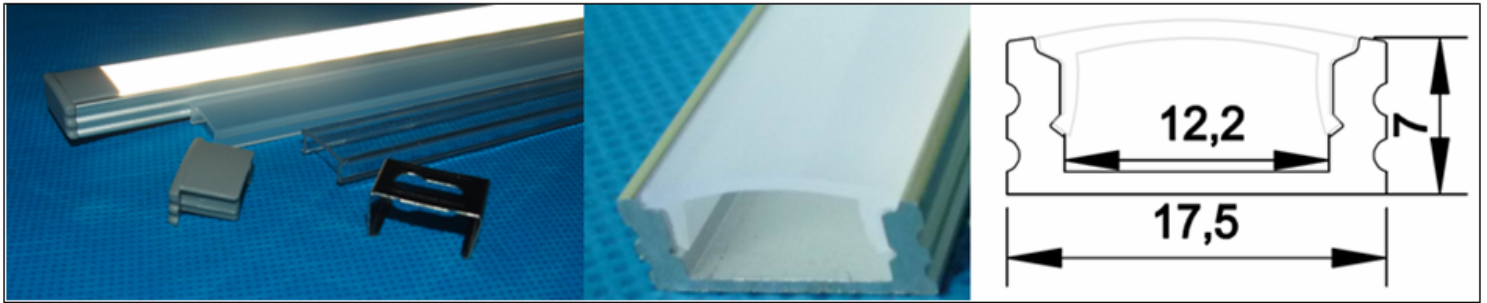

Frosted/Clear/Milky Cover



Model No.	LED Qty	CC/CV	Work Voltage	Power PCB Size (mm)	Water-proof	Color	(CT:K)	CRI (Ra)
QL-F5630A35-W-24C-SG1-AL13	 SMD 5630 70/m 1750lm/m	CC Version	DC24V	15W/m	DC24V	<input type="checkbox"/> Warm White	2700-3100K	≥80
QL-F5630A35-N-24C-SG1-AL13						<input type="checkbox"/> Nature White	4000-4200K	
QL-F5630A35-P-24C-SG1-AL13						<input type="checkbox"/> Pure White	6000-6500K	
F5630A35SA-W-24C-AL13	SMD 5630 70/m 1600lm/m	CC Version	DC24V	15W/m	DC24V	<input type="checkbox"/> Warm White	2500-3100K	≥90
F5630A35SA-N-24C-AL13						<input type="checkbox"/> Nature White	4000-4500K	
F5630A35SA-P-24C-AL13						<input type="checkbox"/> Pure White	6000-6500K	
F2835A60SA-W-24C-AL13	SMD 2835 120/m 1800lm/m	CC Version	DC24V	19.2W/m	No	<input type="checkbox"/> Warm White	2900-3100K	≥90
F2835A60SA-N-24C-AL13						<input type="checkbox"/> Nature White	4000-4500K	
F2835A60SA-P-24C-AL13						<input type="checkbox"/> Pure White	6000-6500K	




LED Energy Inc. Main: (905) 538-7228 Toll free: +1 (855) 264-2200
 174 West Beaver Creek Rd, Richmond Hill, ON. L4B 1B4

LED Light Bar with QL-AL07 Aluminum Profile

Constant Current Version+CRI ≥ 90

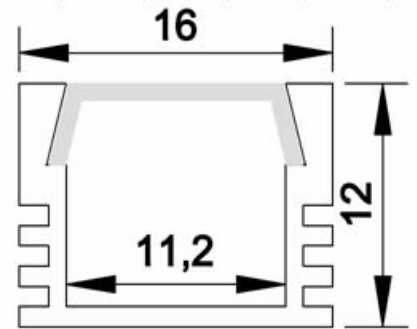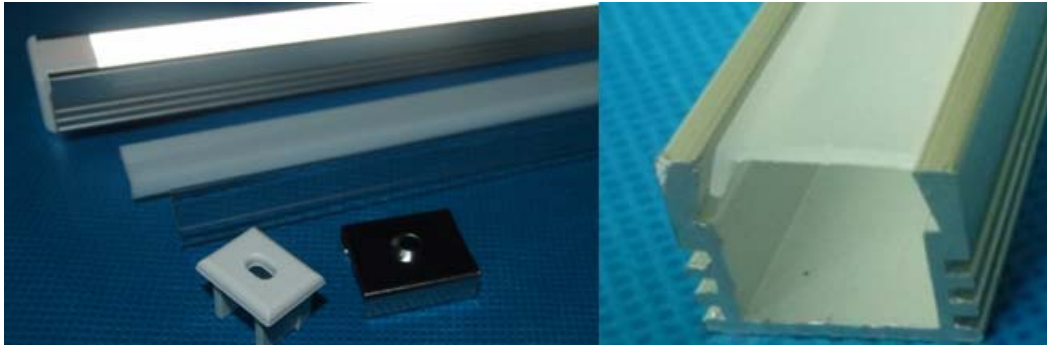



Frosted/Clear/Milky Cover

Model No.	LED Qty	CC/CV	Work Voltage	Power PCB Size (mm)	Water-proof	Color	(CT:K)	CRI (Ra)
QL-F5630A35-W-24C-SG1-AL07	 SMD 5630 70/m 1750lm/m	CC Version	DC24V	15W/m	DC24V	<input type="checkbox"/> Warm White	2700-3100K	≥80
QL-F5630A35-N-24C-SG1-AL07						<input type="checkbox"/> Nature White	4000-4200K	
QL-F5630A35-P-24C-SG1-AL07						<input type="checkbox"/> Pure White	6000-6500K	
F5630A35SA-W-24C-AL07	SMD 5630 70/m 1600lm/m	CC Version	DC24V	15W/m	DC24V	<input type="checkbox"/> Warm White	2500-3100K	≥90
F5630A35SA-N-24C-AL07						<input type="checkbox"/> Nature White	4000-4500K	
F5630A35SA-P-24C-AL07						<input type="checkbox"/> Pure White	6000-6500K	
F2835A60SA-W-24C-AL07	SMD 2835 120/m 1800lm/m	CC Version	DC24V	19.2W/m	No	<input type="checkbox"/> Warm White	2900-3100K	≥90
F2835A60SA-N-24C-AL07						<input type="checkbox"/> Nature White	4000-4500K	
F2835A60SA-P-24C-AL07						<input type="checkbox"/> Pure White	6000-6500K	




LED Light Bar with QL-AL11 Aluminum Profile

Constant Current Version+CRI≥90

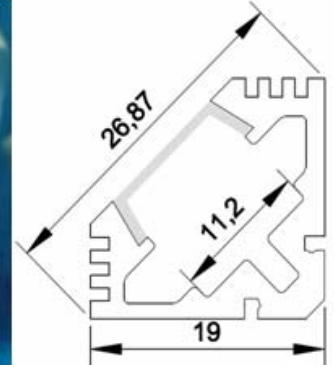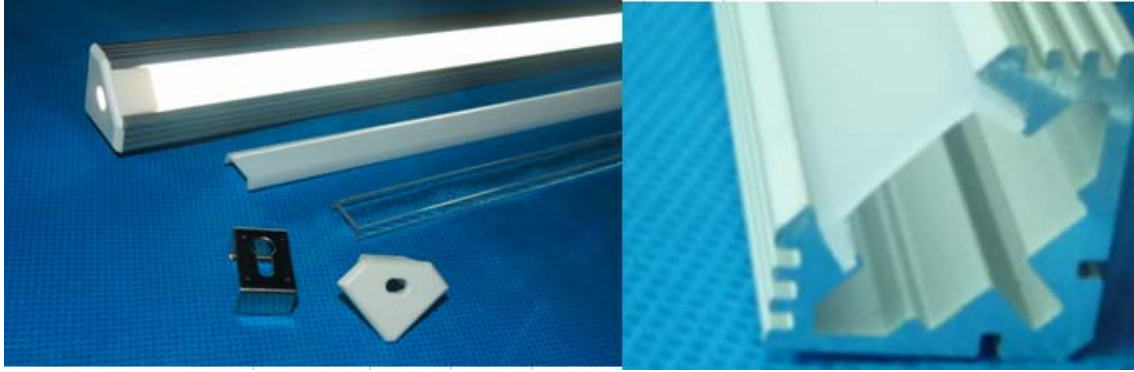

Frosted/Clear/Milky Cover

Model No.	LED Qty	CC/CV	Work Voltage	Power PCB Size (mm)	Water-proof	Color	(CT:K)	CRI (Ra)
QL-F5630A35-W-24C-SG1-AL11	 SMD 5630 70/m 1750lm/m	CC Version	DC24V	15W/m	DC24V	<input type="checkbox"/> Warm White	2700-3100K	≥80
QL-F5630A35-N-24C-SG1-AL11						<input type="checkbox"/> Nature White	4000-4200K	
QL-F5630A35-P-24C-SG1-AL11						<input type="checkbox"/> Pure White	6000-6500K	
F5630A35SA-W-24C-AL11	SMD 5630 70/m 1600lm/m	CC Version	DC24V	15W/m	DC24V	<input type="checkbox"/> Warm White	2500-3100K	≥90
F5630A35SA-N-24C-AL11						<input type="checkbox"/> Nature White	4000-4500K	
F5630A35SA-P-24C-AL11						<input type="checkbox"/> Pure White	6000-6500K	
F2835A60SA-W-24C-AL11	SMD 2835 120/m 1800lm/m	CC Version	DC24V	19.2W/m	No	<input type="checkbox"/> Warm White	2900-3100K	≥90
F2835A60SA-N-24C-AL11						<input type="checkbox"/> Nature White	4000-4500K	
F2835A60SA-P-24C-AL11						<input type="checkbox"/> Pure White	6000-6500K	

