

Plug and Play

LEI High Lumen Output (HO) 120lm/Watt Ballast Compatible LED T8 Tube Series


Features, Benefits, Performance

- High Lumen Output (HO) 0.5W EPISTAR 2835 LED chip
- High CRI>80Ra; CRI>90Ra available
- G13, rotatable end cap available. But without DLC for rotatable end cap
- 50% reduction in energy consumption
- 50,000hrs lifespan, 5 years warranty
- Vibration and impact resistant
- No mercury allowing for non-hazardous waste materials
- Instant illumination, no flicker, no buzz
- No UV emission




Structure

- A. PC cover
- B. LED PCB
- C. D sharp aluminum housing
- D. LED driver PC cover
- E. Built-in led driver

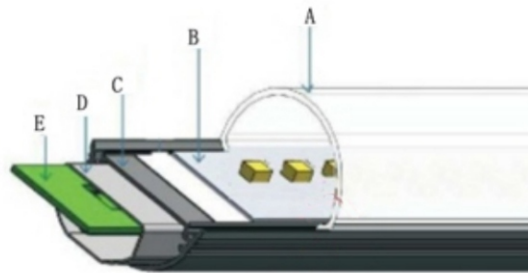

Dimensions

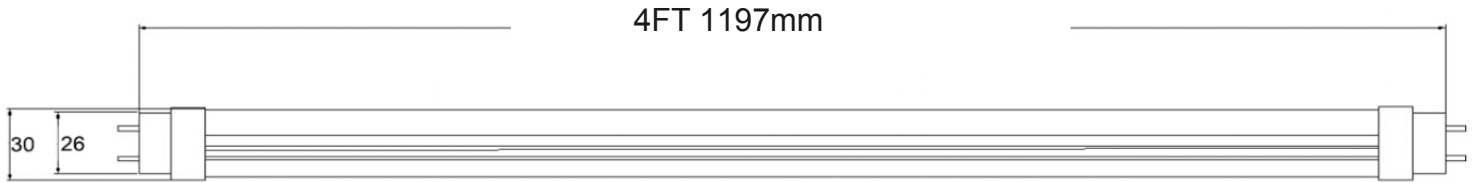

Parameters

Model	Watts	Length	LED Type	Lumen	Voltage	CCT	CRI	PF	Certificate
LEIT8-HO-22W1200	22W	4FT/1200mm	(SMD2835)	2470~2490lm	100-277 / 347 VAC	3000K	>80Ra	>0.95	DLC ETL cETL
				2550~2570lm		4000K			
				2630~2650lm		5000K			
				2750~2770lm		6500K			

Applications

