

LEI 25W 4ft LED T5 BALLAST BYPASS TYPE B SP SERIES

LED LAMPS

LEI Ballast Bypass LED T5 tube is the energy efficient way of getting rid of the older Ballasts (that are required by fluorescent lamps) without having to invest in newer ballasts.

The in built driver enables it to work as a standalone lamp without requiring ballasts. It saves energy and produces high quality light with virtually zero maintenance costs.



SHATTER PROOF (NSF CERTIFIED)

LEI's FT LED T5 comes with Shatter proof glass coated with PET making it ideal for Food and Health industry.



WIDER LIGHTING AREA

LEI's LED PET coated Glass T5 tubes uniformly distribute light to a wider area, 160° Beam Angle



BALLAST BYPASS

Ballast Bypass built to work with 120-347V old and new building.



HIGH OUTPUT

LEI's LED T5 are high lumen output lamps 135 Lumens/W. Producing more light for less energy cost.

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- Frosted glass lens with PET coated
- G5 Base

ELECTRICAL

- Has operating voltage of 120-347V
- 25 W
- Power Input Double-ended
- Fa8 Lamp Holder Socket
- CRI 82
- Beam Angle 330°
- Power Factor > 0.9
- Operating Temperature of -20°C - 45°C (-4° F to 113°F)

LISTINGS & RATINGS

- UL, cUL, UL 1598C listed
- DLC listed
- Dry, Damp Environment
- Rated Lifetime of L70 50,000 hrs


INSTALLATION

Not rated for use in fully enclosed fixtures.

WARRANTY

5 years Limited Warranty

ILLUMINANCE CHART

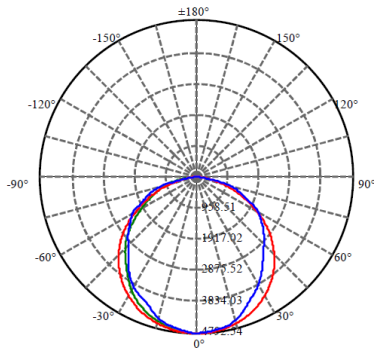

APPLICATION

- Office Lighting
- Warehouse lighting
- Retail Lighting
- Industrial lighting

ORDERING INFORMATION

MODEL NO.	DLC WATTAGE	CCT	INITIAL LUMENS	EFFICACY LM/W	DESCRIPTION
LEIBPT5-SP4F25W-30-9	25	3000K	3400	135	LED T5 120-347V \4FT Ballast Bypass
LEIBPT5-SP4F25W-35-9	25	3500K	3500	140	LED T5 120-347V \4FT Ballast Bypass
LEIBPT5-SP4F25W-40-9	25	4000K	3500	140	LED T5 120-347V \4FT Ballast Bypass
LEIBPT5-SP4F25W-50-9	25	5000K	3500	140	LED T5 120-347V \4FT Ballast Bypass

PROJECT:

TYPE:

NOTES: