

40W equivalent B11 Candelabra bulb LEICAN-4WE12-XXXXK-C




Features

- Power Output: 4W
- 40W equivalent B11Candelabra bulb
- Max Operating Temperature: 105°F
- Light Output: 300 lm
- Color Temp: 2700K, 5000K
- Color Rendering Index: 80
- Dimming Range:5-100%
- LED Driving Current: 140 mA
- Rated Voltage: 90-135Vac
- Efficacy:75 lumen / watt
- Beam Angle: 220°
- Life Span: 25.000 hours
- Warranty: 5 years
- Noise Level @ 10': <24dB
- Noise Level @50': <24dB
- Power Factor: >90
- THO: <20
- Key Dimensions:2.36 x 2.36 x 4.49 inches
- Weight:0.32 lb
- Base: E12
- Certificate: UL, FCC, Energy Star

Technical Information


Model No.	Description	Lumens	Beam Angle CCT	Dimmable	Weight	Input Voltage	Certificates
LEICAN-4WE12-XXXXK-C	LEO 4W B11 Candelabra bulb	300 lm	220 degree 2700/5000K	5-100%	0.32 lb	90-135 Vac	UL, cUL FCC Energy Star

Lux Chart

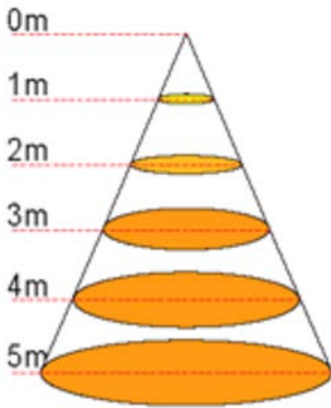

Model#	Height	Average Lux (lx)	Light range (dia.)
LEICAN-4wE12-XXXK-C	1M	45.8	200cm
LEICAN-4wE12-XXXK-C	2M	11.4	400cm
LEICAN-4wE12-XXXK-C	3M	5.0	600cm
LEICAN-4wE12-XXXK-C	4M	2.9	800cm
LEICAN-4wE12-XXXK-C	5M	1.8	1000cm

Distribution curve

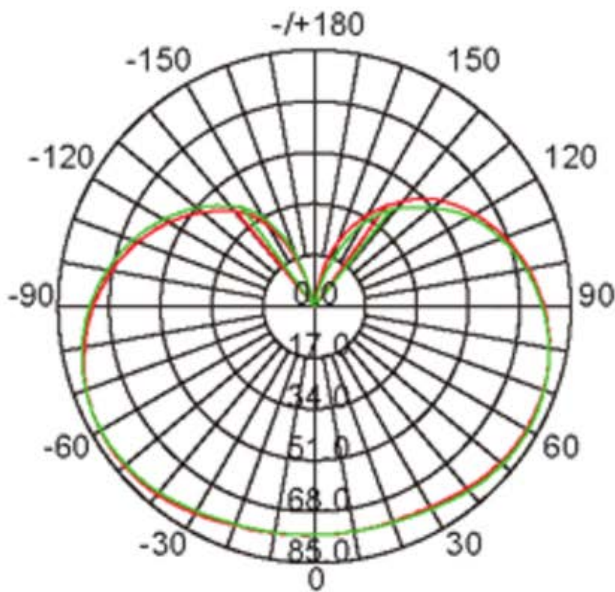

UNIT: cd
 — C0/180
 — C90/270
 AVERAGE BEAM ANGLE(50%):285.3 DEG



LM79
LM80

