

### Enlightening Expectations

## LED PAR20 Bulb LEIPAR20-6WE26-XXXXK



### **Features**

- Power Output: 6W
- 50W equivalent Halogen bulb
- Max Operating Temperature: 105°F
- Light Output: 550 Im
- Color Temp: 2700K, 5000K
- Color Rendering Index: 90
- Dimming Range:5-100%
- Rated Voltage: 100-120Vac
- Efficacy: 95 lumen / watt
- > Beam Angle: 36°
- Life Span: 25.000 hours
- > Warranty: 5 years
- Noise Level @ 10': <24dB</p>
- ➢ Noise Level @ 50': <24dB</p>
- Key Dimensions: 63mm Dia x 84.5mm H
- Weight: 222g
- Base: E26
- Certificate: UL/cUL, FCC, Energy Star

#### **Technical Information**

Model No.	Description	Lumens	Beam Angle I CCT	Dimmable	Weight(g)	Input Voltage	Certificates
LEIPAR20-6WE26-XXXXK	LED Bulb 6W Equivqlent 50W	550 lm	36 degree 2700, 5000K	5-100%	222	100-120 Vac	UL, cUL FCC Energy Star


#### Attention

- O Assure the lamps are being used under specified voltage.
- Ambience temperature needs to be between -20°C~45°C
- O Indoor application only, not for moist or corrosiveenvironment
- O The lamps must NOT be subjected to mechanical stress.
- O Assure the lamps to be mounted into fixture firmly
- Only installed by professional personnel

LED Energy Inc. Main: (905) 538-7228 Toll free: +1 (855) 264-2200 174 West Beaver Creek Rd, Richmond Hill, ON. L4B 1B4




# Lux Chart



Model#	Height	Average Lux (Ix)	Light range (dia.)
LEIPAR20-6wE26-XXXXK	1M	1431	70cm
LEIPAR20-6wE26-XXXXK	2M	358	139cm
LEIPAR20-6wE26-XXXXK	3M	159	209cm
LEIPAR20-6wE26-XXXXK	4M	89	278cm

## **Distribution curve**

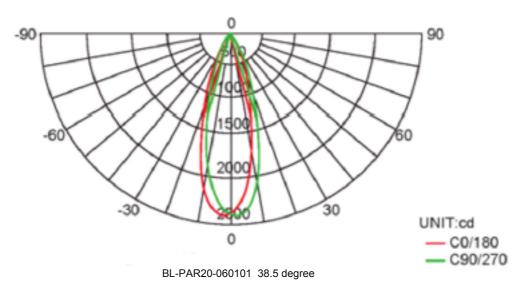

### Applications

Track Lights, Recessed Downlights, Display Lights



LED Energy Inc. Main: (905) 538-7228 Toll free: +1 (855) 264-2200 174 West Beaver Creek Rd, Richmond Hill, ON. L4B 1B4

www.ledenergy.ca