


_ED Tube Series

Features And Application

LED tube has the characteristics of energy saving and long-term life. Its 2/3/4/5 feet tube adopts medium-power and low-power LED as its illuminant. It has excellent thermal and optical performance. It can be used for wide voltage range and is ideal for normal lighting, entertainment lighting, sittingroom, office, factory, etc.

Specifications	
Beam Angle: 120°	Total Power Consumption:
AC Frequency: 47-63HZ	2ft/3ft/4ft/5ft (8W/11W/15W/18W/22W/33W optional)
High Efficiency: Max. 600/900/1200/1800/2500lm	Housing&Lampshade: PBT , PC and Aluminum Base
Operating Voltage: 85-264VAC	Color: Warm White/Natural White/Cool White
Lifetime: 70% Lumen Maintenance@25,000hrs	Lifetime: 70% Lumen Maintenance@25,000hrs

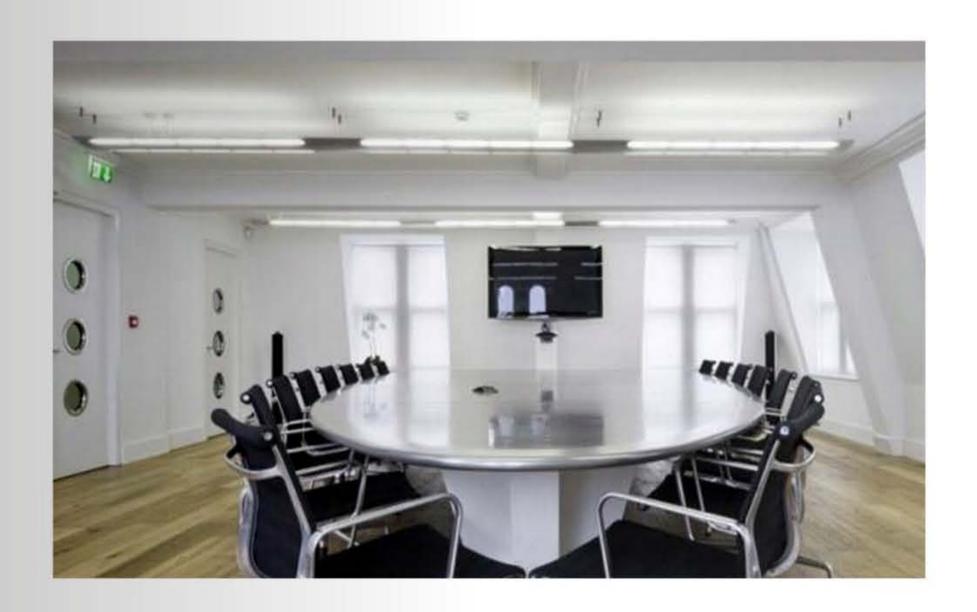






JIUZHOU OPTOELECTRONIC TECHNOLOGY CO., LTD.

Dimension

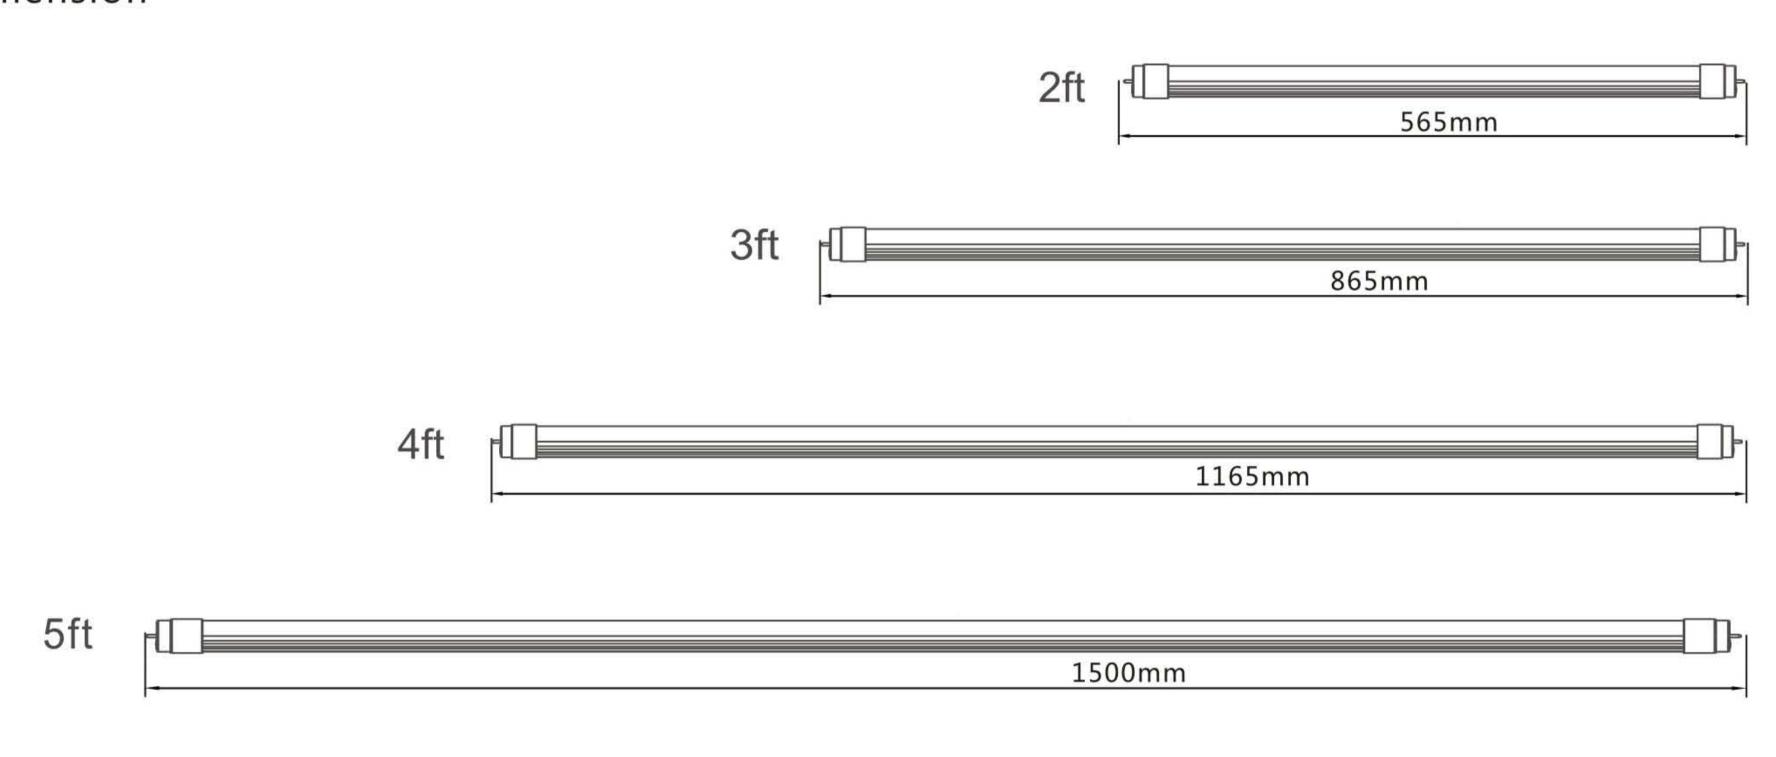

Patent:

- EU Design Pending P. R. C. Design Patent
- US Design Patent Pending













__ED Tube Series

Features And Application

LED tube has the characteristics of energy saving and long-term life. Its 2/3/4 feet tube adopts mediumpower and low-power LED as itsilluminant. It has excellent thermal and optical performance. It can be used for wide voltage range and is ideal for normal lighting, entertainment lighting, sittingroom, office, factory, etc.

JZU-DGC06081 Voltage: AC 100-240V,50/60Hz Power Consumption: 8W Dimensions: T5: L565mm x Φ16mm L573XW25XD37mm Luminous flux: 450Lm(WW),500Lm(PW), 550Lm(CW) Light Source: SMD3014 CCT: WW/PW/CW Tube Material: Aluminum+PC PCS/CTN: 25PCS

JZU-DGCA2151 Voltage: AC 100-240V,50/60Hz Power Consumption: 15W Dimensions: T5: L1165mm x Φ16mm L1198XW25XD37mm Luminous flux: 900/1100/1200lm Light Source: SMD3014, x 240 pcs CCT: WW/PW/CW Tube Material: Aluminum+PC PCS/CTN: 25PCS

T5 Tube drawing

