

## LEI 2x4' LED Panel Light, 38 watt 4940 Lumen, UL/cUL, DLC

# **Specifications**


Model# LEIP7-38W-XXXXX

Description 2x4' LED Panel Light

Power 38W
Lumen Efficiency 130lm/w
Voltage Input 100-277Vac
Lumen output 4940lm

Color Temperature 3000K,4000K, 5000K


CRI Ra>80 LED Chips SMD 2835 Power Factor >0.9 Frosted Operating Temp. -25°<= -55'C Certificates UL/cUL, DLC warranty 5 years >50000Hrs L70 life span Frame Aluminum Max.Input current 0.5A Dimmable Yes(0-10V) Weight 11 Kg (24 lbs)

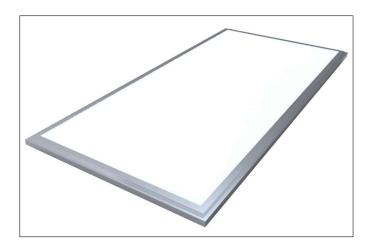

## **Order Information**


Item Number	Description	Power	Voltage Input	Dimmable	ССТ	Lumen Output	Certificates
LEIP7-38W-XXXXX	2x4' LED Panel light	38W	100-277Vac	Yes	3000k 4000K 5000k	4940lm	UL/cUL, DLC

## **Lux Chart**



Height	Average Lux (lx)	Light range (dia.)
1M	1345.6	293.9cm
2M	336.4	587.8cm
3M	149.5	881.6cm
4M	84.1	1175.5cm
6M	37.4	1763.3cm

## **Photometrics**


























## LEI 2x4' LED Panel Light, 38 watt 4940 Lumen, UL/cUL, DLC

# Installation

Wall Mount












This is the combining drawing for wall and panel, please make the installation according to the installation drawing.

#### **Recessed Mount**

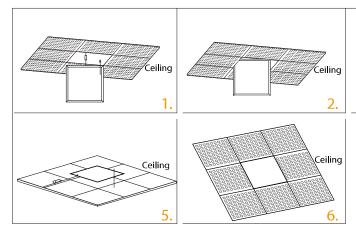






### Suspension








 Put the ball end of the steel wire through the hole of the mount bracket of panel



Put the other end of the steel wire through the wire holder, and adjust the length of the steel wire.

Push to adjust length of wire





4. hang the 4 wire holders to the sleeve anchor bolt

























### LEI 2x4' LED Panel Light, 38 watt 4940 Lumen, UL/cUL, DLC

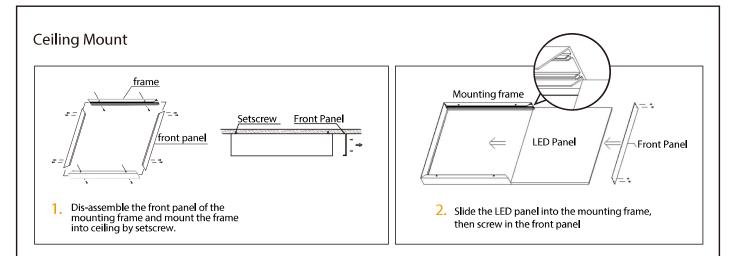


## **Dimension/Weight**

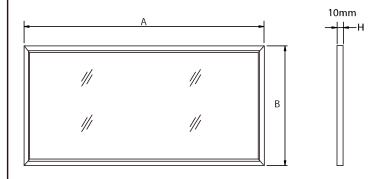

Size	Dimension (A x B mm)	Weight
2X4'	1210x603	11kg (24 <b>l</b> bs)

# Wiring Diagram (0-10V Dimmable Panel)

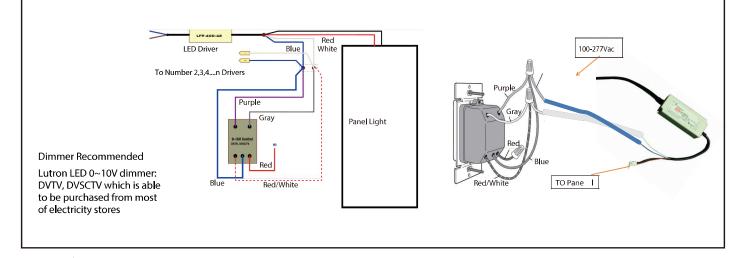

LED Energy Inc. Main: (905) 538-7228 Toll free: +1 (855) 264-2200 174 West Beaver Creek Rd, Richmond Hill, ON. L4B 1B4