

## LED BR Bulb

### LEIBR40-14WE26-XXXXK-F




## Features

- Power Output: 14W
- 100W equivalent BR bulb
- Max Operating Temperature: 105°F
- Light Output: 1100 lm
- Color Temp: 2700K, 5000K
- Color Rendering Index: 80
- Dimming Range: 5-100%
- LED Driving Current: 140 mA
- Rated Voltage: 90-135Vac
- Efficacy: 78 lumen / watt
- Beam Angle: 120°
- Life Span: 25,000 hours
- Warranty: 5 years
- Noise Level @ 10': <24dB
- Noise Level @ 50': <24dB
- Key Dimensions: 4.8 x 4.8 x 6.3 inches
- Weight: 1.06 lb
- Base: E26
- Certificate: UL, FCC, Energy Star

## Technical Information


Model No.	Description	Lumens	Beam Angle   CCT	Dimmable	Weight	Input Voltage	Certificates
LEIBR40-14WE26-XXXXK-F	LED Bulb 14W Equivalent 100W	1100 lm	120 degree 2700/5000K	5-100%	1.06 lb	90-135 Vac	UL, cUL FCC Energy Star

## Lux Chart

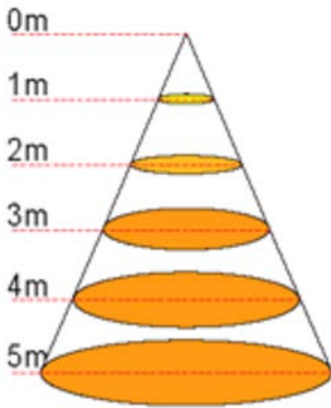

Model#	Height	Average Lux (lx)	Light range (dia.)
LEIBR40-14wE26-XXXXK-F	1M	83.5	284cm
LEIBR40-14wE26-XXXXK-F	2M	20.9	569cm
LEIBR40-14wE26-XXXXK-F	3M	9.3	853cm
LEIBR40-14wE26-XXXXK-F	4M	5.2	1137cm
LEIBR40-14wE26-XXXXK-F	5M	3.3	1422cm

## Distribution curve

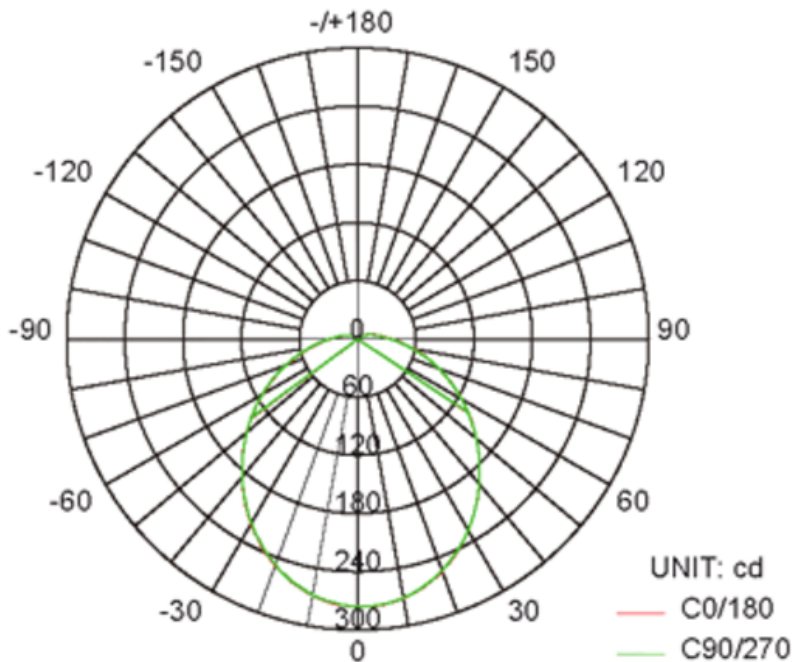

AVERAGE BEAM ANGLE(50%):109.8 DEG



LM79  
LM80

