

LED Energy Canopy Light, 75 watt 7500 Lumen, ETL/cETL & DLC

Specifications

Model#	LEICNPA-75W-277
Description	LED Canopy light
Power	75W
Voltage Input	100-277Vac,50 / 60HZ
Lumen output	7500 lm
CCT	2700K,4000K,5000K,5700K
CRI	Ra>70
Housing	Die Casting Aluminum
Power Factor	0.95
Driver	UL certified
Lens	PC
Operating Temp.	-25.C - 50°C
IP Rating	IP65
Certificates	ETL/cETL, DLC
warranty	5 years
L70 life span	>50000Hrs
IK Rating	IK07
Dimmable	Non Dimmable
Product Dimrnsions	225mm x 225 mm x 100 mm




LM79
LM80



Order Information

Item Number	Description	Power	Voltage Input	Driver	CCT	Lumen Output	Certificates
LEICNPA-75W-277	LED Canopy Light	75W	100-277Vac	UL Certified	2700K, 3000K 4000K, 5000K	7500lm	ETL/cETL, DLC

Lux Chart

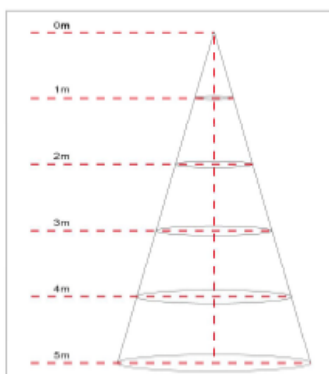

Height	Average Lux (lx)	Light range (dia.)
1M	430.6	405.3cm
2M	107.7	810.6cm
3M	47.85	1215.9cm
4M	26.92	1621.1cm
5M	17.23	2026.4cm

Photometrics

