

LED BR Bulb

LEIBR30-11WE26-XXXXK-F




Features

- Power Output: 11W
- 75W equivalent BR bulb
- Max Operating Temperature: 105°F
- Light Output: 800 lm
- Color Temp: 2700K, 5000K
- Color Rendering Index: 80
- Dimming Range: 5-100%
- LED Driving Current: 140 mA
- Rated Voltage: 90-135Vac
- Efficacy: 73 lumen / watt
- Beam Angle: 120°
- Life Span: 25,000 hours
- Warranty: 5 years
- Noise Level @ 10': <24dB
- Noise Level @ 50': <24dB
- Key Dimensions: 3.74 x 3.74 x 5.35 inches
- Weight: 0.86 lb
- Base: E26
- Certificate: UL, FCC, Energy Star

Technical Information


| Model No. | Description | Lumens | Beam Angle CCT | Dimmable | Weight | Input Voltage | Certificates |
|------------------------|--------------------------------|--------|--------------------------|----------|---------|---------------|----------------------------|
| LEIBR30-11WE26-XXXXK-F | LED Bulb 11W Equivalent 75W | 800 lm | 120 degree 2700/5000K | 5-100% | 0.86 lb | 90-135 Vac | UL, cUL FCC Energy Star |

Lux Chart

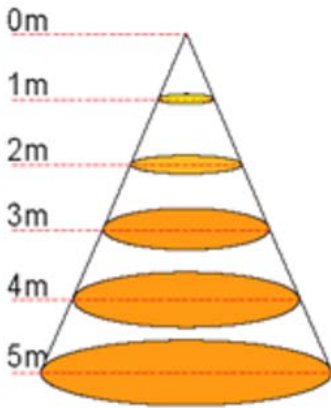

| Model# | Height | Average Lux (lx) | Light range (dia.) |
|------------------------|--------|------------------|--------------------|
| LEIBR30-11wE26-XXXXK-F | 1M | 83.5 | 284cm |
| LEIBR30-11wE26-XXXXK-F | 2M | 20.9 | 569cm |
| LEIBR30-11wE26-XXXXK-F | 3M | 9.3 | 853cm |
| LEIBR30-11wE26-XXXXK-F | 4M | 5.2 | 1137cm |
| LEIBR30-11wE26-XXXXK-F | 5M | 3.3 | 1422cm |

Distribution curve

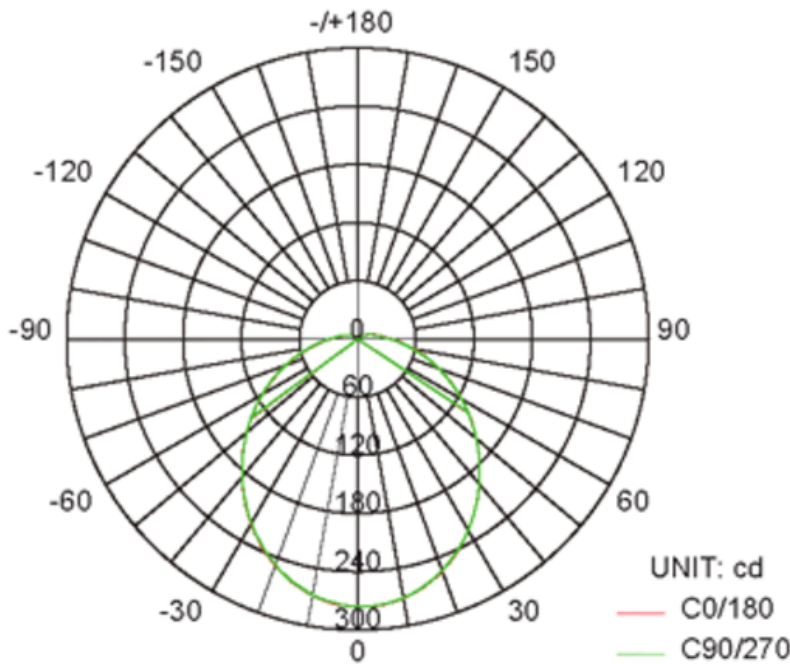

AVERAGE BEAM ANGLE(50%):109.8 DEG



LM79
LM80

